


GZH5306ET PRO

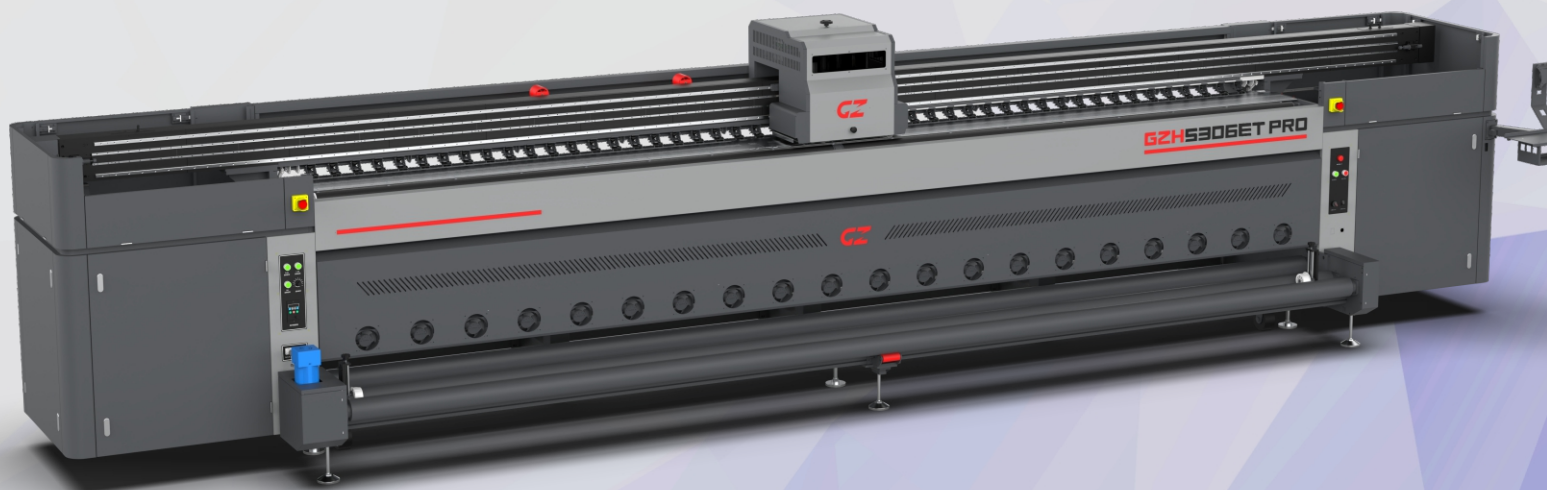

High cost-effective 5.3m solvent solution

- ★ Rocket speed up to **397 m²/h** !
- ★ Super wide printing width up to **5.3** meters!
- ★ **3 rows staggered heads** configuration!
- ★ **GnTek Negative Pressure System!**
- ★ Effective **sectional-control IR drier** !
- ★ Advanced color management software!
- ★ **Magnetic linear and metal encode system!**

GZH5306ET PRO




Genuine Epson T3200-U3-S print head!

With built-in heating unit and multi grayscale output, the T3200-U3-S print head assures stable nozzle jetting and smooth color gradation. The unique Precision Core tech of Epson ensures high precision locating.



GnTek negative recirculation system

GZ industrial negative pressure recirculation system with pressure balancing unit and pressure protection unit assures stable ink flow, saves maintenance time and protects the print heads.



Staggered three rows of print heads!

6x T3200-U3-S print heads staggered in 3 rows deliver superior output up to 397m²/h. Water cooling mounting plate and water cooling suction platform lower printing temperature to prevent printing malfunctions.



Magnetic linear motor and metal encoder!

Magnetic linear motor and metal encoder for high precision output in quiet printing process.



High-efficiency drying system!

Pre, Mid and extended heater plus sectional IR drier effectively dry the printing for quick finish during such high speed printing.



Newly developed pinch roller system!

GZ newly developed pinch roller can adjust contact point according to the thickness of the feeding material, ensuring smooth and wrinkle free media delivering.

ITEM	SPECIFICATION
Model	GZH5306ET PRO
Print Head	6x Epson T3200-U3-S print heads staggered in 3 rows(1 head 2 colors)
Ink	Gongzheng eco-solvent ink
Ink Supply System	GnTek Negative Pressure System with 5L ink tanks
Printing Width	Max. 5300mm
Media Type	Banner, Frontlit, Backlit, Film.....
Drying System	Pre, Mid and Extended heater + IR Dryer
Printing Speed	300x1200dpi(2pass) 397m ² /h 300x1800dpi(3pass) 280m ² /h 300x2400dpi(4pass) 217m ² /h
Data Interface	External: USB3.0; Internal: Fiber optical
Working Environment	Temp.23°C~29°C, Humidity:50%~80%
Software	Onyx/ FlexiPrint...+ GZ Printer Manager
Power	50Hz/AC,220V±10%, 10A(printer)+380V±10%,27A(IR drying system)
Packed/Installed Size	LxWxH(mm):7700x1520x1785
G.W./ N.W	2700KGS

*Specifications are liable to change without prior notice. The printing speeds are measured in 5 m width printing.

Gongzheng Group Co., Ltd.

Add: Miaobei Village, Yongjia County, Wenzhou
City, Zhejiang Province, China 325102
Tel: +86-577-67319778
Email: gzsales@gongzheng.com
Web: www.gongzheng.com

Authorized distributor:

