

EXCELLENT TOP BROWN

EXBR / UKraft


Code no. 24124



Mill

Kolicevo Karton d.o.o. Proizvodnja kartona d.o.o., Slovenia

1 Board structure

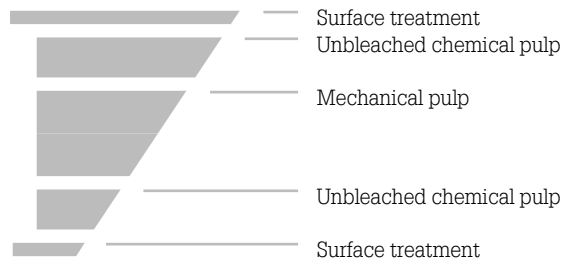

	% of total board	+/- in % of total
Virgin fibre	95	5
Surface treatment	5	5
Total	100	

2 Technical specifications

Grammage	Caliper	Stiffness				
		L&W 5° md	L&W 5° cd	L&W	Taber 15° md	Taber 15° cd
g/m ²	µm	mNm	mNm	$\sqrt{(md \times cd)}$	mNm	mNm
195	350	15.5	5.5	9.2	8.1	2.7
205	380	20.7	7.4	12.4	10.5	3.7
220	410	26.5	9.4	15.8	13.3	4.7
235	450	33.5	11.7	19.8	17.6	5.9
250	480	41.0	14.3	24.2	20.7	7.2
270	525	50.8	17.3	29.6	25.6	8.6
290	575	61.1	20.7	35.6	30.8	10.4

Property	Value	Tolerances	Test standard
Cobb 60 sec. top (g/m²)	< 30		DIN EN ISO 535
Cobb 60 sec. reverse (g/m²)	< 30		DIN EN ISO 535
Grammage (g/m²)		+/- 2%	EN ISO 536
Caliper (µm)		+/- 5%, > 350 g/m ² +/- 3%	EN 20534
Stiffness (mNm)		- 15% ¹	DIN 53121
Testing climate	23°C	+/- 1°C	EN ISO 186
	50%	+/- 2% rh	

¹Permissible: -15% of the target stiffness. This applies to 100% of all measured single values. The single value is a calculated average of five measurements per sheet. The stiffness has to be measured at both sides. The resulting average value is then the stiffness of the single sample. L&W figures are binding, Taber figures are indicative.

All figures mentioned above may be subject to technical changes.

EXCELLENT TOP BROWN

EXBR / UKraft / Virgin Fibre Cartonboard

Code no. 24124



Mill

Kolicevo Karton d.o.o. Proizvodnja kartona d.o.o., Slovenia

Last update of values 11.03.2019



Excellent Top Brown – the virgin fibre Kraft cartonboard for a unique, natural presentation – reflects the trend towards brown packaging material. The consistently natural brown colour of top and reverse sides with a perfect surface offers a natural appearance while at the same time giving very good printing properties. Brown cartonboard packaging is in fashion for showcasing products at the POS while conveying a natural feel and even higher ecological aspirations.

1 Features

- brown Kraft top and reverse sides
- tailor-made to meet the growing trend towards brown packaging material
- good printability – due to special preparation of the top side
- high stability
- excellent stiffness
- very good Cobb value on both sides

grammages:

195 205 220 235 250 270 290 g/m²

2 Applications*

- Dry Food
- Chilled Food (secondary packaging)
- Frozen Food
- Chocolate and Confectionery
- Fast Food and Food Service
- Fruit and Vegetable
- Cosmetics and Personal Care

3 Mill Certificates

Downloadable certifications

Forest management

FSC® [TUVDC-COC-100867-F](#)

FSC® [TUVDC-CW-100867-F](#)

PEFC™ [DC-COC-000867](#)

Hygiene management [EN 15593 \(HACCP\)](#)

Quality management [ISO 9001](#)

4 Mill Informations

The mill Kolicevo (Slovenia) offers the following features:

- board machine with swing mode
- flexible production of virgin fibre and recycled cartonboard as well as liner
- pioneer of product innovations (e.g. natural Kraft cartonboard)
- experienced, innovative production team and professional technical support
- strategically located to the Western, Eastern and Southern European markets
- short transportation routes and flexible service guaranteed

*It is a general recommendation for enduse applications; legally binding are only the declaration of compliance and the sensory statement issued by MM Karton for each individual type of cartonboard.

If you are interested in Excellent Top Brown or have any further questions, please contact FBB@mm-karton.com www.mm-karton.com